

Using Machine Learning Algorithm Detecting Denial Of Service

Attacks

Mr.D.Uma Vishveshwar¹, D.Vaishnavi Devi²,N.Rakesh Reddy²,M.Mourya²,S.Sandeep²

¹Asst.Professor, Computer Science and Engineering, CMR Engineering College, Medchal, T.S, India, ²B.Tech, Computer Science and Engineering, CMR Engineering College, Medchal, T.S, India

Abstract

Currently, Distributed Denial of Service Attacks are the most dangerous cyber danger. By inhibiting the server's ability to provide resources to genuine customers, the affected server's resources, such as bandwidth and buffer size, are slowed down. A mathematical model for distributed denial-of-service attacks is proposed in this study. Machine learning algorithms such as Logistic Regression and Naive Bayes, are used to detect attacks and normal scenarios. The CAIDA 2007 Dataset is used for experimental study. The machine learning algorithms are trained and tested using this dataset and the trained algorithms are validated. Weka data mining platform are used in this study for implementation and results of the same are analysed and compared. Other machine learning algorithms used with respect to denial of service attacks are compared with the existing work.

Keywords: DDOS attacks, Machine learning for security, Mathematical model for Bandwidth Depletion, Throughput analysis of attack and normal scenario

Introduction


A denial of service (DoS) attack is a sort of cyberwarfare in which malicious users prevent genuine applications from accessing network infrastructure. They try to drain the victim system's resources and cause network congestion by creating a massive amount of traffic in the targeted system's area without capturing vital information or compromising credential files. The massive amount of data created makes it impossible for each packet to reach its destination. A three-way handshake is necessary to establish a network connection in most cases. The client establishes a connection between client and server, which the server acknowledges after receiving the client's request and assigning capacity inside the reservoir connection. Ultimately, the recipient validates the connectivity, indicating that the process has been completed. The perpetrator establishes significant similarities and transmits photons as expected, but never hears the provider's final affirmation notification. Consequently, the relationship almost never increases wealth, exposing the host to the reservoir space reserved for all unfinished transactions.

If the critical success factors are met, the server's buffer will be brimming with unresolved attachments, leaving little room for acceptable TCP connections, effectively prohibiting the server from undertaking a DoS

strike. An endeavour to restrict authorised users from accessing a targeted machine network and

information capabilities is referred to as a DoS attack. Because of the limitations of conventional networking devices, the diversity of attack strategies, and the

Mr.D.Uma Vishveshwar *et. al.*, / *International Journal of Engineering & Science Research*
 programmers' opacity towards host sites, DDoS attacks are the most difficult security problems to identify, mitigate, and trace today. DDoS attacks can be mitigated by enforcing strict security standards and deploying an appropriate approach, including firewalls and vendor-specific workarounds. As mentioned in Singh KJ *et al.*, a DDOS assault scenario is depicted in Fig. 1 where the attacker infects a reliable system under Command and Control (C & C) is accomplished by infecting a computer with a Trojan virus via malicious software (2015). BOTS refers to infected systems controlled by the attacker. Mc Gregory Set *al.* dubbed the connectivity of these BOTS

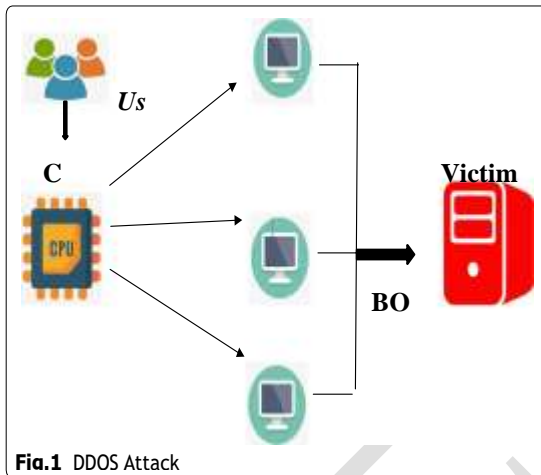

BOTNETS (2013). These BOTNETS, such as HTTP or P2P, are explained well by Sheng L *et al.* (2012), and are used by the attacker through C & C. If BOTNETS are in place, the attacker can gain complete control of the machines by sending well-executed commands to each bot via remote control. Once the botnet has tracked or targeted the end-IP user's address, each bot will begin working on it to reply by transferring requests to the targeted computers, most likely causing a delay. Botnet detection techniques often include either putting up a phishing attack to harvest malware components or establishing a detection algorithm. The network intrusion detection system monitors system and network logs to uncover malicious operations. Suspicious types of behaviour, biometrics, or name- servers could all be exploited. There really are numerous explanations why it is that a botnet is used to perform a DDoS attack, which includes, for example, a significant number of zombie connections that facilitate the constant transformation of severe attacks and threats, Difficulty represents the main wrongdoer, and the flexibility to exploit guidelines to do something about protective measures. It is difficult to distinguish between real and virtual time. Bots are the malicious systems of the user as shown in Fig. 1 which are hacked by the attackers ultimately resulting in the reduction of the processing time of the server. The appropriate solution to this issue that can be suggested is BOTNETS.

The major goal of this paper's work is to distinguish between normal and attack scenarios by analysing the throughput of the data packets respectively.

In this course, the throughput threshold is calculated in order to differentiate between normal and attack scenarios. To make further analysis more effective, machine learning algorithms like logistic and naive bayes are applied to the CAIDA 2007 datasets. Logistic regression is used majorly for predicting purposes, which is our main goal, and naive bayes based on the Bayes theorem gives better accuracy by assuming the independent features of the variables. Mathematical modelling is framed in order to derive the relationship between the data packets' inter-arrival time and throughput, as reported by CAIDA. The following is a summary of the work in this paper: "Literature survey" section examines similar work in the field of DDOS attacks and conducts a comparative analysis. The proposed methodology for identifying DDOS attacks is discussed in "Proposed methodology for the identification of DDoS attack" section followed by a mathematical model and a machine learning model. "Conclusion and Scope for Further Enhancement" section summarises the findings of the experimental models and provides a brief summary of the findings. In "Declarations" section, the work finishes with a full description of the study conducted in this paper, as well as future directions and references in "References" section.

Literature survey

Of these, DDoS (Distributed Denial of Service) operations are one of the most prominent, having a negative effect on server functionality and inflicting substantial damage. In a DDoS assault, the malicious user exploited workstations (acknowledged as corpses) to broadcast a large number of requests from either of these just-now undead to a destination by leveraging defined or unannounced potential vulnerabilities. It would demand a significant amount of data transmission or computing time from either the victimised virtualized environment. This study developed a DDoS detection method based on the C.4.5 methodology and countered the DDoS threats. Once supplemented with trademark identification techniques, this approach provides a classification tree that immediately and adequately diagnoses characteristic forgeries for Dos and ddos strikes [1]. [2] introduces a DDoS attempt warning system based on deep neural networks (Deep Defence). Technological advances have allowed for comprehensive modelling and inference by extracting relevant high-level traits from average ones. It is the establishment of a continuous recurrent neural network well with the aim of understanding commonalities from network activity cycles and tracing network attack activities. The experimental findings demonstrate that we are getting closer and closer to traditional machine learning models. When compared to a traditional machine learning approach, the inaccuracy rate is reduced from 7.517 percent to 2.103 percent in a bigger data set. [3] describes ArOMA, an autonomous DDoS prevention infrastructure that takes advantage of

the governmental or political and highly centralised manageability possibilities of the Software Defined Networking (SDN) framework. ArOMA, in particular, has the opportunity to comprehensively break down the barriers between diverse security operations, including monitoring systems, anomaly detection, and mitigating measures, while eliminating the need for non-trivial human participation. It also encourages ISPs and their customers to collaborate on DDoS mitigation by logically spreading critical security functions across the ISP, allowing the ISP to tackle DDoS traffic according to the needs of its consumers. Our findings show that ArOMA can efficiently maintain streaming server performance at a tolerable level even in the presence of high-rate DDOS attacks. In an experiment [4], machine learning techniques were investigated for recognising swarm DDoS attacks. The UNBS-NB 15 and Privation exposure datasets, which are well-known for recognising malware DDoS attacks, were used in the analysis. Machine learning methods such as Support Vector Machine (SVM), Artificial Neural Network (ANN), Nave Bayes (NB), Decision Tree (DT), and Reinforcement Classification are used to start investigating the accuracy, number of false positives (FAR), sensitivity, specificity, false positive rate (FPR), AUC, and Matthews correlation coefficient (MCC) of datasets (USML). The performance of the KDD99 dataset has been shown to be superior to that of the UNBS-NB 15 dataset. This evaluation is crucial in computer security and certain other related fields.

[5] recommends the DBod botnet detection method, which is based on the binary mixture, based on an assessment of the querying pattern of network activity. The proposed method takes advantage of the fact that hosts infected with the same partial fulfilment of the requirements ransomware query the very same sets of domains throughout the domain list, with an overwhelming percentage of these inquiries failing since only a tiny percentage of these domains are genuinely associated with an active C&C. The practicality of the proposed strategy is evaluated using DNS data collected over a 26-month period from an educational network environment. The findings show that DBod is capable of efficiently and accurately detecting both traditional and prospective decision outcome botnets continuously in real connections. [6] investigated classification algorithms for recognizing network Cyberattacks in an experiment. The UNBS-NB 15 and KDD99 publicity datasets, which are well-known for identifying malware DDoS attacks, were used in the analysis. Machine learning methods such as Convolutional Neural Network (SVM), Multilayer Perceptron (ANN), Naive Bayes (NB), Decision Tree (DT), and Reinforcement Classification are used to investigate the accuracy, false alarm rate (FAR), sensitivity, specificity, false positive rate (FPR), AUC, and Matthews correlation coefficient (MCC) of datasets (USML). The effectiveness of the KDD99 dataset has been shown to be superior to that of the UNBS-NB 15 dataset. This validation is crucial in cryptography and other relevant disciplines. [7] proposes a machine learning botnet detection model and evaluates its performance using standard machine learning

approaches and Domain Name Service query data. According to empirical observations, machine learning approaches may be useful in botnet detection, with the random forest algorithm producing quality overall detection results of over 90%. To protect the SDN-based cloud from flow table overloading DDoS attacks, [8] proposes a novel flow-table sharing approach. Using the idle flow-tables of other OpenFlow switches on the network, this strategy prevents the switch's flow-table from overloading. Our provision of facilities and services reduces the cloud system's susceptibility to data breaches with minimal involvement from the SDN controller. As a result, communication overhead is kept under control. Our predictions are supported by the vast majority of three-dimensional computer research.

With 7.3 trillion bot requests analysed in the fourth quarter of 2017, there was a dramatic increase in the use of malware attacks for credentials abuse, signalling that 40% of password resets were illegitimate.

Remote code execution weaknesses, particularly in enterprise software, have recently been a favourite target for attackers aiming to enslave machines for botnets. The Go Ahead embedded HTTP server, which offers 700,000 potential targets, and the Access The Cloud Server are two of the most prominent targets attacked by cybercriminals [9]. For clarification, [10] is based on the study line "Why? What? How?" Firstly, we'll go over why aggressive engagement is so important. After that, the concepts, types, and dangers of adversary warfare are discussed. Finally, we go over the most frequent attack algorithms and the basis of these factors in each application area. Faced with the growing complexity of the neural network model, this paper focuses on the domains of photos, text, and corrupted files, as well as the crown prosecution categorization and methodologies of these different information sources, allowing researchers to quickly choose their own type of research. At the conclusion of this review, significant discussions and unresolved difficulties are raised and referenced towards other similar examinations. [11, 17], and [18] advocated adopting Dempster's tandem rule to investigate mixed proof of various types of cloud strikes in Pakistan's IT business. [12, 16] propose a structural interpretation learning framework that employs machine learning techniques to classify botnets and benign programmes based on botnet-specific patterns of ready to fully and attributes. The selected patterns have been tested using legitimate evaluation metrics and have been shown to have great detection accuracy and a low false positive rate. In both experimental and statistical tests, the support vector machine classifier beats conventional classification approaches. [13, 14], and [15] provide an online consecutive tractor trailer ML solution for DDoS detection based on network entropy estimate, founder, information gain ratio, and the Extra-Trees algorithm. The approach's unsupervised feature decreases the quantity of superfluous normal traffic information used in DDoS detection, which lowers false positive rates and increases the accuracy. The supervised portion, on the other hand, ensures that the

unsupervised part's false positive rates are reduced and that DDoS traffic is correctly classified. Various experiments were carried out to test the suggested technique utilising three datasets: NSL-KDD, UNB ISCX 12, and UNSW-NB15. 98.23%, 99.88%, and 93.71 percent, respectively, with positive result rates of 0.33 percent, 0.35 percent, and 0.46 percent.

Furthermore, [19, 20], and [21] investigated DDoS attacks in depth and evaluated the reduced feature set based upon that domain expertise to drastically enhance accuracy.[21] tested and analysed the NSL-KDD dataset with an altered feature set and discovered that our recommended NIDS can detect 99.1 percent of DDoS attacks. Our findings were compared to those of other studies. [22] uses the PCA methodology to minimise the dimension of the features and, hence, the detection time complexity. PCA provides for a significant decrease in prediction time while maintaining the preponderance of the original data. The data is placed into an RNN to train and generate a detection model again when the dimensions have been decreased. The evaluation findings show whether PCA-RNN may achieve significant performance gains in terms of accuracy, sensitivity, precision, and F-score for the real dataset when compared to different available DDoS attack detection technologies. In an experiment, [23] tested machine learning methods for recognising network DDoS attacks. The UNBS-NB 15 and KDD99 publicity data-sets, which are well-known for detecting botnet DDoS attacks, were used in the analysis. Machine learning methods such as Support Vector Machine (SVM), Artificial Neural Network (ANN), Naive Bayes (NB), Decision Tree (DT), and Unsupervised Classification are used to investigate the accuracy, number of false positives (FAR), attentiveness, thoroughness, misclassification rate (FPR), area under the curve, and Matthews correlation analysis (MCC) of datasets (USML). The performance of the

KDD99 dataset has been shown to be superior to that of the UNBS-NB 15 dataset. This validation is crucial in information security and other allied subjects. [24] tested machine learning methods for spotting botnet intrusions in an experiment. In an experiment, [23] tested machine learning methods for recognising network DDoS attacks. The UNBS-NB 15 and KDD99 publicity datasets, which are well-known for detecting botnet DDoS attacks, were used in the analysis. Machine learning methods such as Support Vector Machine (SVM), Artificial Neural Network (ANN), Naive Bayes (NB), Decision Tree (DT), and Unsupervised Classification are used to investigate the accuracy, number of false positives (FAR), attentiveness, thoroughness, misclassification rate (FPR), area under the curve, and Matthews correlation analysis (MCC) of datasets (USML). The performance of the KDD99 dataset has been shown to be superior to that of the UNBS-NB 15 dataset. This validation is crucial in information security and other allied subjects. [24-27] tested machine learning methods for spotting botnet intrusions in an experiment Table 1. The characteristics of the instruments that are regularly used to process large

Mr.D.Uma Vishveshwar *et. al.*, / *International Journal of Engineering & Science Research*
amounts of data are represented in Table 2. Table 3 contrasts machine learning methods and associated deployments to see which ones are best for the study's specifications[29-32].

Proposed methodology for the identification of DDoS attacks

A DDoS is a type of cyberattack that uses the power of a large number of malware-affected systems to disrupt network connectivity or service, resulting in a denial of service for users of the targeted resource. In this work, two models are proposed to identify DDoS attacks: (i) A Mathematical Model (ii) A Machine Learning Model [33-37] The proposed mathematical model derives the relationship between the inter-arrival time of requests and throughput. Further throughput analysis was carried out to identify DDoS attacks. Logistic Regression and Naive Bayes models are used to build machine learning models to identify DDoS attacks.

Mathematical model for identifying DDoS attacks

The system's quantitative behaviour can be estimated [38] using a mathematical model. In order to discover the model's strengths and limitations, quantitative findings from mathematical models may be easily compared to observational data. So, a mathematical model is proposed in this section in order to identify DDoS attacks. The most significant characteristics for determining assaults are bandwidth and throughput, where bandwidth represents how much data can be moved across a communications channel and the amount of data successfully transmitted from source to destination is measured by throughput. The probability of bandwidth depletion given in Eq. 1 is the base formula which is used to derive the relationship between the inter-arrival time of the requests and throughput

Table 1 An overview of the contributions

Authors	Their contributions	Proposed work
Zekri M et.al [1]	Usage of C4.5 algorithm and Signature detection algorithms were developed for automatically and successfully detecting signature attacks for DDoS attacks	
Xiaoyong Yuan et. Al [2]	A DDoS assault detection strategy based on deep learning was proposed and then compared to a regular machine learning model	
Ceron J et.al [23]	Botnet assaults were detected using the UNBS-NB 15 and KDD99 publicity datasets	
Mohamed Idhammad et.al [13]	An interactive, progressive, semi-supervised ML algorithm for DDoS attack detection was created using connectivity diversity prediction, co-clustering, mutual information proportion, and the Extra-Trees methodology	
Saikat Das et.al [21]	NSL-KDD dataset was tested and analysed	
Qian Li et.al [22]	For the real dataset, PCA-RNN was examined and shown to have significant performance increases in terms of accuracy, sensitivity, precision, and F-score	
Tong Anh Tuan et.al [24]	Support Vector Machine (SVM), Artificial Neural Network (ANN), Naive Bayes (NB), Decision Tree (DT), and semi-supervised learning have been used to evaluate and compare the UNBS-NB 15 dataset (USML)	

Machine learning technologies such as logistic regression and naive Bayes are also used to detect intrusion

To detect DDoS attacks, a mathematical model and a machine learning model were suggested, and the miss rate for each was then compared

Botnet assaults were detected using CAIDA 2007 records

To identify patterns, the dataset was partitioned into 70:20:10 train, test, and validation categories, and ML strategies, notably logistic regression and naive bayes, were implemented

CAIDA 2007 dataset was tested and analysed

On a real-world dataset, naive bayes and logistic regression were reported to have positive performance improvements in terms of accuracy, sensitivity, precision, and F-score

The CAIDA 2007 dataset was analysed and compared to logistic regression, naive bayes, and experimented findings, with the results for both being summarised together

Equations 4, 5 and 6 show the final results of the derivations where inter-arrival time and throughput are inversely proportional to each other. Throughput is calculated using Eqs. 8 and 9, the values of which are listed in Table 4. All the notations used while framing mathematical formulas are listed in Table 4.

The probability for calculating consumption in terms of bandwidth is given by:

$$P_{BC} = (\alpha / c!) / \sum_{i=0}^{\infty} \alpha^i / i! \quad (1)$$

where $\alpha = (\beta_{AB} + \beta_{LB}) / \beta_{Total}$

$$\beta_{AB} = TP_A \cdot I_{AB} \quad (2)$$

$$\beta_{LB} = TP_{LB} \cdot I_{LB}$$

(3)

C – No. of open or unused bandwidth.

Let's assume the size of the packet is the same in both cases, such as attack as well as normal traffic, i.e.

$TP_A = TP_{LB} = T_B$, then we have.

$$\alpha = T_B / \beta_{Total} [1/I_{AB} + 1/I_{LB}],$$

(α is Average of Bandwidth).

Table 2 Overview of Software handling Big Data

Tools/Software	Advantages	Disadvantages
ORANGE	<ul style="list-style-type: none"> It's a terrific technique for projecting demand while knowing the patterns and trends of five years' worth of data Working further insights into it, and hypothesis models testing of data projected by orange 	

RAPIDMINER	<ul style="list-style-type: none"> • it is a robust data mining application that can handle everything from data mining through model deployment and model operations • Its end-to-end data science platform includes all of the data preparation and machine learning tools
KNIME	<ul style="list-style-type: none"> • Access to all current and future advancements in data science, machine learning, and artificial intelligence • Avoid the danger of price changes by lock-ing your data science IP into a proprietary format. Make data science accessible to everyone, not just Windows users
APACHE SPARK	<ul style="list-style-type: none"> • Analytics is advanced • Dynamic in nature • Multilingual • Powerful
HADOOP	<ul style="list-style-type: none"> • Minimum network traffic • High throughput • High Speed • Fault tolerance
TENSORFLOW	<ul style="list-style-type: none"> • Good for data visualization • Scalable • Compatible
<ul style="list-style-type: none"> • It isn't very reliable when dealing with massive datasets. Orange may crash if you use datasets that operate well in Python • As a result, it's appropriate for smaller projects, teaching reasons, or exploratory data analysis • The programme has a tendency to crash frequently; this is especially true with neural networks and other complex algorithms. Some versions have limitations • Even the student edition has a 10,000-row output restriction, so if you're trying to analyse a 12,000-point data set, 2000 points will be excluded at random • The number of rows is unlimited, but the number of columns shouldn't get much larger than ~ 10,000 	
<ul style="list-style-type: none"> • Fewer Algorithms • Small files issue • Window criteria • Doesn't suit well for multi-user environment • Problem with small files • Vulnerable • Security issues • Supports only batch processing • Inconsistent • Less Speed • Dependency • Frequent Updates 	

Table 3 Comparison overview of machine learning models with respect to DDoS detection

ML model for detecting DDoS attacks
Applications

Logistic Regression	<ul style="list-style-type: none"> • It is used to forecast the likelihood of a target variable using the supervised learning classification technique
Naive Bayes	<ul style="list-style-type: none"> • Predict a class of datasets for both binary and multi-class categorization • In multi-class predictions, it performs better
C4.5	<ul style="list-style-type: none"> • Used to make a decision based on a sample of data either a univariate or multivariate predictors
KNN	<ul style="list-style-type: none"> • Evaluate the similarities between such a request and all the data items, select the K closest cases to the inquiry, and thereafter vote for the most common categorization
SVM	<ul style="list-style-type: none"> • Find a hyperplane in an N-dimensional space that categorises data points clearly
means	<ul style="list-style-type: none"> • Allows a single piece of data to belong to two or more clusters

$$\alpha = K \cdot \frac{1}{I_{AB}}, \quad K = \frac{T_B}{\beta_{Total}}, \quad \text{where } K \text{ is constant and } \frac{1}{I_{LB}} \rightarrow 0$$

$$\text{i.e. } \alpha \propto \frac{1}{I_{AB}}$$

(4)

Equations 1 and 4 can be used to deduce the following conclusions:

Table 4 The notations used in mathematical models

Notation	Descriptions
PBC	Depletion/consumption of bandwidth probability
β_{ab}	Attacking clients' bandwidth consumption
β_{lb}	Consumption of bandwidth by genuine clients
β_{Total}	Depletion/consumption of total bandwidth
TPA	In relation to bandwidth, the attacker's packet size that is transferred
TPLB	In relation to bandwidth, the legitimates packet size that is transferred
I_{AB}	The assaulting clients' inter-arrival rate
I_{LB}	The legitimates clients' inter-arrival rate
C	Number of open channels or bandwidth that isn't being utilised

$$PBC \propto \alpha \propto I_{AB}$$

$$PBC \propto 1/C \quad (6) \quad (5)$$

Based on the findings reached from Eqs. 5 and 6, the attacks are detected via determining the arrival time of two adjacent data packets referred as inter arrival time. A sliding window of 10 s is used to analyse this arrival time. The formula in Eq. 7 is used to calculate the mean inter-arrival time.

$$Arrival_{mean} = \frac{1}{N} \sum_{i=1}^N IP^{ArrivalTime}$$

where $IP^{ArrivalTime}$ denotes the IP address' inter-arrival time in a sliding window of 10 s.

Poisson distributions are used for attack packets and Gaussian distributions for ordinary clients. In this work, CAIDA datasets 2007 is used for real time estimation by analysing the throughput and inter arrival time of the attack and normal scenario simultaneously. The formula used in this process is highlighted in Eq. 8 & 9.

$$T_h = TransferPacket_{size} \times Inter - ArrivalTime_{attacker}$$

Or

$$T_h = TransferPacket_{size} * Frequencyofarrival(s) \quad (8) \quad (9)$$

20,090 distinct IP addresses are considered for each 10 s gap. Throughput, Frequency of arrival, and Inter-arrival Time for both attack and normal scenarios are analysed in Table 2. A part of the datasets can be viewed in the respective tables.

Table 5 contains details about the attack scenario, such as data packet inter-arrival time, throughput, and frequency, source IP address, destination IP address, and protocol. Table 3 shows the following observations:

- The Median value is considered as $t_{flesfold}$ (i.e. 755.97).
- Throughput above $t_{flesfold}$ is considered as fl_{ifl} and is categorised as an attack.
- Throughput below $t_{flesfold}$ is considered as low and categorised as normal.

Table 5 Throughput analysis for attack and normal scenarios

Inter-arrival time	Frequency of arrival (s)	Throughput	Source	Destination	Label	Condition label
--------------------	--------------------------	------------	--------	-------------	-------	-----------------

0.000119	8431.703	5,05,902.200	202.1.175.252	71.126.222.64	Attack Scenario	Attack
0.000691	1446.992	86,819.500	192.120.148.227	71.126.222.64	Attack Scenario	Attack
0.020945	47.743	2864.629	51.81.166.201	71.126.222.64	Attack Scenario	Attack
0.000150	6668.623	4,00,117.400	192.95.27.190	71.126.222.64	Attack Scenario	Attack
17.531215	788.022	42.912	192.120.148.227	71.126.222.64	Normal Scenario	Normal
17.533944	857.684	556.771	51.81.166.201	71.126.222.64	Normal Scenario	Normal
17.537825	432.463	39.046	192.95.27.190	71.126.222.64	Normal Scenario	Normal
17.544041	1139.061	31.168	40.75.89.172	71.126.222.64	Normal Scenario	Normal
17.546908	467.301	1.128	192.120.148.227	71.126.222.64	Normal Scenario	Normal
17.548384	2500.000	3.356	192.95.27.190	71.126.222.64	Normal Scenario	Normal
17.549695	8431.703	3.455	202.1.175.252	71.126.222.64	Normal Scenario	Normal

- The Miss Rate for the mathematical model is 0.0025, which is acceptable. A False negative is the probability that a true positive will be missed by the mathematical model. It is given as:

Miss Rate = $FN / (FN + TP)$.

True positive (TP) = 20,038 (Correctly Predicted). False

Negative (FN) = 52.

Miss Rate = $52 / 20090 = 0.0025$.

Mathematical models are taking CAIDA 2007 datasets which are real-time datasets especially consisting of denial of service information. Mathematical models focus on predicting between attack and normal data by analysing the throughput and the frequency of that particular information. It's like more throughput, means more time for processing data and more time for processing data does not allow the genuine clients to take the control and fulfill their requirement of processing and enabling it to be in queue for infinite durations. Validation with respect to miss rate is also performed to analyse the correctness of the mathematical model considering CAIDA DATASET.

Machine learning model for identifying DDoS attacks

Activity diagram for the experimental model

The activity diagram for the experimental model is shown in Fig. 2 and the procedure for the same is as follows:

1. CAIDA 2007 dataset is considered for calculating the throughput of the throughput in order to categorize the normal and attack scenarios. The throughput of the

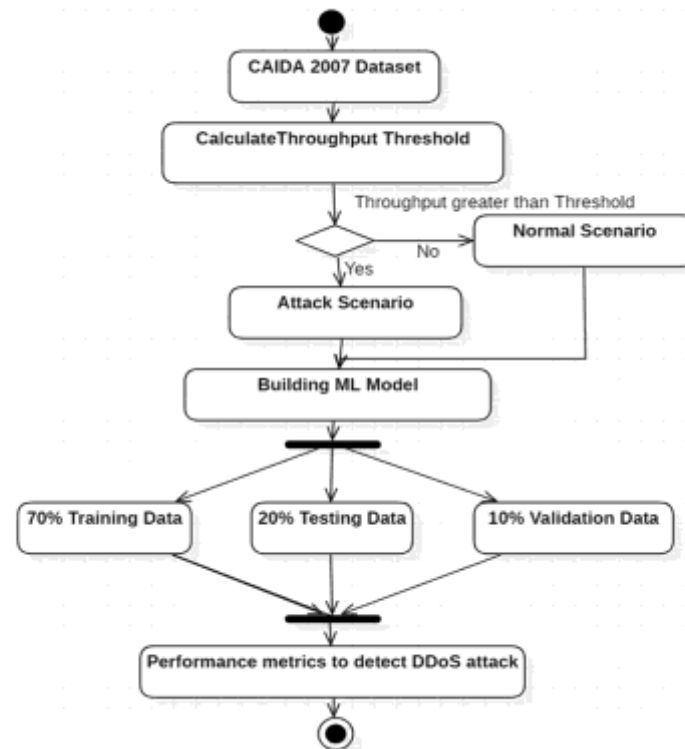


Fig. 2 Activity Diagram for experimental model

data is compared with the threshold. Throughput above the threshold is categorised as an attack, else normal. Later, the ML model such as logistic regression and naïve bayes is used to further validate the proposed model. The Median of the CAIDA 2007 Dataset is considered as the throughput threshold.

- Two machine learning models are built; (i) using Logistic regression and (ii) using Naive Bayes. In general, logistic regression is used for prediction analysis. Since the main focus of the work in this paper is predicting DDoS attacks, the logistic algorithm suits well. In general, Naive Bayes assumes conditional independence for all features. As a result, if some of the features are in fact interdependent (as in the case of a high feature space), the prediction may be inaccurate.
- The original dataset consisting of 20,090 records is categorized into a 70:20:10 ratio. That is, 70% of the data (140,063) is considered as training data, 20% of the data (5425) is test data and the rest of 10% of the data (602) is used for cross validation purposes.
- Employees are monitored based on successfully identified occurrences, incorrectly diagnosed cases, sharpness, retention, totally false positive frequency, classified as positive percentage, and coefficient of determination of mistake. The total of the Positive Class and Genuine Positive Rates is Appropriately Recognized Occurrences. Consequently, the aggregate of the False Positive (FP) and False Negative (FN) percentages equalled Inconsistently Labelled Situations. The quantity of appropriately diagnosed examples multiplied by the number of instances yields correctness.

Results and discussion

This section contains the results of the experimental model using machine learning algorithms such as logistic regression and naïve bayes. Weka tool is used for fetch-

Mr.D.Uma Vishveshwar *et. al.*, / International Journal of Engineering & Science Research

ing the experimented results. Additionally, by subsampling the data, non-incremental learning methods can be used on large datasets. Weka also provides Hadoop and Spark compatibility as options for distributed data mining. The distributed Weka Base package contains base "map" and "reduce" activities that are not dependent on any particular distributed platform. At a high level, the major distinction between Weka and the others is flexibility. Weka is a plug-and-play machine learning solution; it's packed in a .jar file and comes with a graphical user interface (GUI) via which you can perform most basic analyses and model development. Weka provides more instruction than the others, which are interactive shell languages, and running ML through Weka appears to be rather magical. As a result, Weka is less flexible than the others for statistical analysis and data exploration. The difference is that the others are programming languages with ML packages and libraries that you can import, whereas the others are not. On the other hand, Weka is a machine learning package. As you might expect, this implies that the others give you a lot more freedom to clean, analyse, and alter your data sets, as well as a lot more ability to control and tweak the underlying algorithms. Further, the performance of the experimental model is analysed. Weka is licenced under the GNU General Public License, making it free to use. Because it is written entirely in Java, it can run on nearly any modern computing platform. It is a collection of data preparation and modelling methods. Weka has some disadvantages in the sense that it is only capable of handling small datasets. An Out Of Memory problem happens whenever a set is larger than a few megabytes.

Figure 3 shows the experimented results using logistic regression machine learning model on the training dataset. Figure 4 shows the experimented results using logistic regression machine learning model on the test dataset and Once testing on the proposed model is successfully completed, cross validation using logistic regression on the rest

```

=== Summary ===
Correctly Classified Instances      14063      100 %
Incorrectly Classified Instances      0      0 %
Kappa statistic      1
Mean absolute error      0
Root mean squared error      0
Relative absolute error      0 %
Root relative squared error      0 %
Total Number of Instances      14063

=== Detailed Accuracy By Class ===
               TP Rate  FP Rate  Precision  Recall  F-Measure  MCC      ROC Area  PRC Area  Class
Weighted Avg.   1.000    0.000    1.000    1.000    1.000    1.000    1.000    1.000    Attack Scenario
               1.000    0.000    1.000    1.000    1.000    1.000    1.000    1.000    Normal Scenario

=== Confusion Matrix ===
  a    b  <-- classified as
7057  0 1  a = Attack Scenario
  0 7006 1  b = Normal Scenario
  
```

Fig. 3

```

=== Summary ===
Correctly Classified Instances      5417      99.8525 %
Incorrectly Classified Instances      8      0.1475 %
Kappa statistic      0.9971
Mean absolute error      0.0015
Root mean squared error      0.0268
Relative absolute error      0.301 %
Root relative squared error      7.3662 %
Total Number of Instances      5425

=== Detailed Accuracy By Class ===
               TP Rate  FP Rate  Precision  Recall  F-Measure  MCC      ROC Area  PRC Area  Class
Weighted Avg.   0.997    0.000    1.000    0.997    0.999    0.997    1.000    1.000    Attack Scenario
               1.000    0.003    0.997    1.000    0.999    0.997    1.000    1.000    Normal Scenario

=== Confusion Matrix ===
  a    b  <-- classified as
2673  5 1  a = Attack Scenario
  0 2744 1  b = Normal Scenario
  
```

Fig. 4 Detailed Accuracy for Test Dataset using Logistic Machine Learning Algorithm


```

==== Summary ====
Correctly Classified Instances      401          99.8339 %
Incorrectly Classified Instances      1          0.1661 %
Kappa statistic                    0.9967
Mean absolute error                  0.0017
Root mean squared error              0.0408
Relative absolute error               0.3323 %
Root relative squared error          8.1828 %
Total Number of Instances           402

==== Detailed Accuracy By Class ====
      TP Rate  FP Rate  Precision  Recall  F-Measure  MCC  ROC Area  PRC Area  Class
1.000  0.000  1.000  1.000  0.998  0.997  1.000  1.000  Attack Scenario
Weighted Avg.  0.998  0.002  0.998  0.998  0.998  0.997  0.999  0.998  Normal Scenario

==== Confusion Matrix ====
  a  b  <-- classified as
306  1 |  a = Attack Scenario
  295 1 |  b = Normal Scenario

```

Fig. 5 Detailed Accuracy applying Cross Validation using Logistic Machine Learning Algorithm

```

==== Summary ====
Correctly Classified Instances      13929         99.0471 %
Incorrectly Classified Instances     134         0.9529 %
Kappa statistic                    0.9809
Mean absolute error                  0.0072
Root mean squared error              0.0642
Relative absolute error               1.4626 %
Root relative squared error          12.0246 %
Total Number of Instances           14063

==== Detailed Accuracy By Class ====
      TP Rate  FP Rate  Precision  Recall  F-Measure  MCC  ROC Area  PRC Area  Class
0.981  0.000  1.000  0.981  0.990  0.981  1.000  1.000  Attack Scenario
1.000  0.015  0.981  1.000  0.991  0.981  1.000  1.000  Normal Scenario
Weighted Avg.  0.990  0.009  0.991  0.990  0.990  0.981  1.000  1.000

==== Confusion Matrix ====
  a  b  <-- classified as
5923 134 |  a = Attack Scenario
  7006 1 |  b = Normal Scenario

```

Fig. 6

602 instances is performed in order to test the model's ability to predict attack and normal scenario using new set of data that was not used in the training and testing datasets as shown in Fig. 5.

Figure 6 shows the experimented results using naïve bayes machine learning model on the training dataset. Figure 7 shows the experimented results using naïve bayes machine learning model on the test dataset and once testing on the proposed model is

```

==== Summary ====
Correctly Classified Instances      5385         98.2627 %
Incorrectly Classified Instances     140         2.7373 %
Kappa statistic                    0.9852
Mean absolute error                  0.0061
Root mean squared error              0.0874
Relative absolute error               1.2275 %
Root relative squared error          11.4761 %
Total Number of Instances           5425

==== Detailed Accuracy By Class ====
      TP Rate  FP Rate  Precision  Recall  F-Measure  MCC  ROC Area  PRC Area  Class
0.985  0.000  1.000  0.985  0.992  0.985  1.000  1.000  Attack Scenario
1.000  0.015  0.986  1.000  0.993  0.985  1.000  1.000  Normal Scenario
Weighted Avg.  0.993  0.008  0.993  0.993  0.993  0.985  1.000  1.000

==== Confusion Matrix ====
  a  b  <-- classified as
2641  40 |  a = Attack Scenario
  2744 1 |  b = Normal Scenario

```

Fig. 7 Detailed Accuracy for Test Dataset using Naive Bayes Machine Learning Algorithm

```

=== Summary ===
Correctly Classified Instances      594      98.6711 %
Incorrectly Classified Instances      6      1.3289 %
Kappa statistic      0.9734
Mean absolute error      0.0163
Root mean squared error      0.109
Relative absolute error      3.2545 %
Root relative squared error      21.8109 %
Total Number of Instances      602

=== Detailed Accuracy By Class ===

      TP Rate  FP Rate  Precision  Recall  F-Measure  MCC  ROC Area  PRC Area  Class
0.974  0.000  1.000  0.974  0.987  0.974  1.000  1.000  Attack Scenario
1.000  0.026  0.974  1.000  0.987  0.974  1.000  1.000  Normal Scenario
Weighted Avg.  0.987  0.013  0.987  0.987  0.987  0.974  1.000  1.000

=== Confusion Matrix ===
  a  b  <-- classified as
299  3  |  a = Attack Scenario
  0 295 |  b = Normal Scenario
  
```

Fig. 8 Detailed Accuracy applying Cross Validation using Naive Bayes Machine Learning Algorithm

successfully completed, cross validation using naïve bayes on the rest 602 instances is performed in order to test the model's ability to predict attack and normal scenario using new set of data that was not used in the training and testing datasets as shown in Fig. 8. From the above implementation and summary of the results for the experimental model using logistic regression and naïve bayes as shown in Table 6.

The observations drawn from Table 4 and Fig. 9 are as follows:

- Accuracy using Logistic regression ranges from 99 to 100% and naïve bayes ranges from 99 to 98%. Thus, logistic regression fetched better results as compared to naïve bayes.
- The MAE using logistic regression is 0, 0.0015, 0.0017, whereas the MAE using naïve bayes is 0.007, 0.006, 0.0163. Thus, the results of logistic regression are also better than naïve bayes in terms of mean absolute error, as the MAE value is the minimum in logistic regression.
- The recall value using the logistic regression algorithm for the attack scenario is 0.997 and for the normal scenario is 1.000. The recall value using the naïve bayes algorithm for the attack scenario is 0.974 and for the normal scenario is 1.000. This means the difference between the recall value for attack and normal scenario is less in logistic

Table 6 Summary of the results for the experimental model

	Total instances	Correctly classified instances	Accuracy	Precision	Recall	Mean Absolute Error	Machine Learning Algorithm used	Class
Training data	14,063	14,063	100	1.000	1.000	0	Logistic Regression	Attack
	14,063	13,929	99.04	1.000	0.981	0.007	Naïve Bayes	Attack
	14,063	14,063	100	1.000	1.000	0	Logistic Regression	Normal
Test data	14,063	13,929	99.04	0.981	1.000	0.007	Naïve Bayes	Normal
	5425	5417	99.85	1.000	0.997	0.0015	Logistic Regression	Attack
	5425	5385	99.26	1.000	0.985	0.0061	Naïve Bayes	Attack
Validation Data	5425	5417	99.85	0.997	1.000	0.0015	Logistic Regression	Normal
	5425	5385	99.26	0.986	1.000	0.0061	Naïve Bayes	Normal
	602	601	99.83	1.000	0.997	0.0017	Logistic Regression	Attack
	602	594	98.67	1.000	0.974	0.0163	Naïve Bayes	Attack
	602	601	99.83	0.997	1.000	0.0017	Logistic Regression	Normal
	602	594	98.67	0.974	1.000	0.0163	Naïve Bayes	Normal

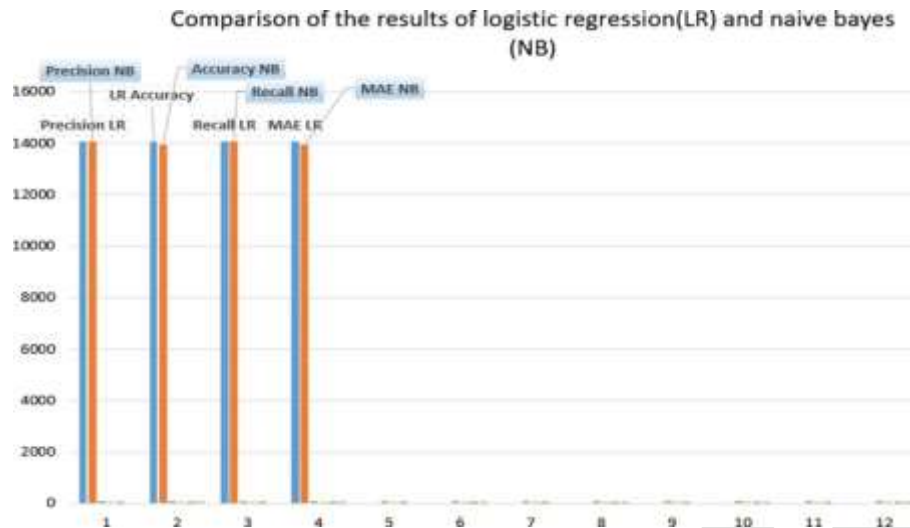


Fig. 9 Graphical comparison of the logistic regression and naive bayes algorithm

but considerably better in naive bayes. The characteristics of Naive Bayes are also considered to be conditionally independent. Though real data sets are never entirely independent, they can come close. In conclusion, compared to logistic regression, Naive Bayes has a slight bias but smaller variance. Naive Bayes is a superior classifier if the data set follows the bias. Both Naive Bayes and Logistic Regression are linear classifiers. However, Logistic Regression produces a probability prediction using a direct functional form, whereas Naive Bayes determines how the data was formed based on the findings.

- The Precision value using logistic regression and naive bayes are the same, i.e. 1.000. Thus, detecting DDoS in terms of precision is not enough. Other parameters like accuracy, recall, MAE are required for analysis of the performance metrics.

Conclusion and scope for further enhancement

The work in this paper started by deriving and analysing the relationship between the arrival time of the requests and throughput using the CAIDA dataset 2007. It is observed that the inter-arrival time of the requests is inversely proportional to the throughput. A mathematical model and a machine learning model have been proposed to identify DDoS attacks. Machine learning algorithms such as logistic regression and Naive Bayes are used to determine the performance of the metrics where logistic regression fetched good

Mr.D.Uma Vishveshwar *et. al.*, / International Journal of Engineering & Science Research results as compared to Naive Bayes. It is also observed that the performance of machine learning models is slightly better than mathematical models. The accuracy of the machine learning model is 100% and the mathematical model is 99.75%.

The work done in this paper helps in identifying DDoS attacks in a simpler and more efficient manner. It even highlights the performance of machine learning algorithms as a comparative study was conducted between logistic regression and naive bayes. Real-time datasets are used for efficient analysis. Since logistic regression and naive bayes fetched good results, they were preferred. Both machine learning and mathematical models have to be tested for live attacks. This paper's findings can also be used to avoid attacks on memory management and firewalls. The presented model acquired findings from a single dataset, which serves as a limitation of the model. Consequently, a distributed data

References

1. Zekri M, Kafhali S, Aboutabit N, Saadi Y, "DDoS attack detection using machine learning techniques in cloud computing environments", 3rd international conference of cloud computing technologies and applications (CloudTech), pp 1–7, 2017. <https://doi.org/10.1109/cloudtech.2017.8284731>.
2. Xiaoyong Yuan, Chuanhuang Li, Xiaolin Li, "DeepDefense: Identifying DDoS Attack via Deep Learning", IEEE International Conference on Smart Computing (SMARTCOMP), 2017.
3. Sahay R, Blanc G, Zhang Z, Debar H. Aroma: an SDN based autonomic DDoS mitigation framework. Computer Security. 2017;70:1–18. <https://doi.org/10.1016/j.cose.2017.07.008>.
4. Antonakakis M, April T, Bailey M, Bernhard M, Bursztein E, Cochran J, Kumar D, Understanding the miraiBotnet. USENIX security symposium, 2017.
5. Wang TS, Lin HT, Cheng WT, Chen CY. "DBod: Clustering and detecting DGA-based botnets using DNS traffic analysis. Computer Security. 2017;64:1–15.
6. Ali ST, Mc Corry P, Lee PHJ, Hao F. Zombie Coin 2.0: managing next-generation Botnets using Bitcoin. Int J Inform Security. 2017;17:411.
7. Hoang X, Nguyen Q. Botnet detection based on machine learning techniques using DNS query data. Future Internet MDPI. 2018;10(5):43.
8. Bhushan K, Gupta BB. "Distributed denial of service (DDoS) attack mitigation in software defined network (SDN)- based cloud computing environment. J Ambient Intell Humaniz Comput. 2018. <https://doi.org/10.1007/s12652-018-0800-9>.
9. Tom Ball. Malicious Botnets responsible for 40% of global login attempts. 2018. <https://www.cbronline.com/news/malicious-botnets-login>

10. Cao N, Li G, Zhu P, Sun Q, Wang Y, Li J, Zhao Y. Handling the adversarial attacks. *J Ambient Intell Humaniz Comput*. 2018;10:2929–43.
11. Pillutla H, Arjunan A. Fuzzy self-organizing maps-based DDoS mitigation mechanism for software defined network- ing in cloud computing. *J Ambient Intell Humanize Computation*. 2018. <https://doi.org/10.1007/s12652-018-0754-y>.
12. Kirubavathi G, Anitha R. Structural analysis and detection of android Botnets using machine learning techniques. *Int J Inf Secur*. 2018;17(2):153–67.
13. Idhammad M, Karim A, Belouch M. Semi-supervised machine learning approach for DDoS detection". *Appl Intell*. 2018. <https://doi.org/10.1007/s10489-018-1141-2>.
14. Doshi R, Apthorpe N, Feamster N. Machine learning DDoS detection for consumer internet of things devices. *IEEE Security and Privacy Workshops (SPW)*. 2018. <https://doi.org/10.1109/SPW.2018.00013>.
15. Co N, Li G, Zhu P, Sun Q, Wang Y, Li J, Zhao Y. Handling the adversarial attacks. *J Ambient Intel Humaniz Comput*. 2018;10:2929–43.
16. Homayoun S, Ahmadzadeh M, Hashemi S, Dehghantanha A, Khayami R. BoTShark: a deep learning approach for Botnet traffic detection. In: Dehghantanha A, Conti M, Dargahi T, editors. *Cyber threat intelligence advances in information security*. Cham: Springer; 2018. p. 137–53.
17. Jha S, Kumar R, Son L, Abdel-Basset M, Priyadarshini I, Sharma R, Long H. Deep learning approach for software main- tainability metrics prediction. *IEEE*. 2019;7:61840–55.
18. Pritam N, Khari M, Son L, Kumar R, Jha S, Priyadarshini I, Abdel-Basset M, Long H. Assessment of code smell for predicting class change proneness using machine learning. *IEEE*. 2019;7:37414–25.
19. Son NTK, Dong NP, Long HV, Son LH, Khastan A. Linear quadratic regulator problem governed by granular neutro- sophic fractional diferential equations. *ISA Trans*. 2019. <https://doi.org/10.1016/j.isatra.2019.08.006>.
20. Khan MMT, Singh K, Son LH, Abdel-Basset M, Long HV, Singh SP, "A novel and comprehensive trust estimation clus- tering based approach for large scale wireless sensor networks". 2019. *IEEE*. pp. 58221–58240.
21. S Das, Ahmed M. Mahfouz, D Venugopal, S Shiva, "DDoS Intrusion Detection Through Machine Learning Ensemble", *IEEE 19th International Conference on Software Quality, Reliability and Security Companion (QRS-C)*, 2019.INSPEC Accession Number: 19045598.
22. Li Q, Meng L, Zhang Y, Yan J. DDoS attacks detection using machine learning algorithms. In: Zhai G, Zhou J, An P, Yang X, editors. *Digital TV and multimedia communication: 15th international forum, ifTC 2018, Shanghai, China, September 20–21, 2018, revised selected papers*. Singapore: Springer; 2019. p. 205–16.
23. Ceron J, Jessen K, Hoepers C, Granville L, Margi C. Improving IoT Botnet investigation using an adaptive network layer. *Sens MDPI*. 2019;19(3):727.
24. Tuan TA, Long HV, Son LH, Kumar R, Priyadarshini I, Son NTK. Performance evaluation of Botnet DDoS attack detec- tion using machine learning. *Evol Intell*. 2020;13:283–94.
25. K Vijaya Babu, Mrutyunjaya S Yalawar, G Sumalatha, G Ramesh Babu, Ravi Kumar Chandu, An Overview of Various Security Issues and Application Challenges of the Attacks in Field of Blockchain Technology, 2022/5/16, ICCCE 2021: Proceedings of the 4th

Mr.D.Uma Vishveshwar et. al., / International Journal of Engineering & Science Research
International Conference on Communications and Cyber Physical Engineering, 365-374, Springer Nature Singapore.

26. B. Narsimha , Ch V Raghavendran , Pannangi Rajyalakshmi , G Kasi Reddy , M. Bhargavi and P. Naresh, Cyber Defense in the Age of Artificial Intelligence and Machine Learning for Financial Fraud Detection Application, International Journal of Electrical and Electronics Research (IJEER) Open Access | Rapid and quality publishing Research Article | Volume 10, Issue 2 | Pages 87-92 | e-ISSN: 2347-470X, 13/05/2022,
<https://ijeer.forexjournal.co.in/archive/volume-10/ijeer-100206.html>
27. Shantala S Yalawar K Vijaya Babu, Mrutyunjaya S Yalawar, A New Approach for Secure Login Method and Forestall Cyber bullying in Social Media, 2019/5, International Journal of Recent Technology and Engineering (IJRTE), Volume 8, Issue 1c2, 1243-1246.
https://scholar.google.co.kr/citations?view_op=view_citation&hl=en&user=Tyqm5YUAAAAJ&citation_for_view=Tyqm5YUAAAAJ:UebtZRa9Y70C.
29. Prashanthi, M., Sumalatha, G., Mamatha, K., Lavanya, K. (2023). Software Defect Prediction Survey Introducing Innovations with Multiple Techniques. In: Kumar, A., Mozar, S., Haase, J. (eds) Advances in Cognitive Science and Communications. ICCCE 2023. Cognitive Science and Technology. Springer, Singapore. https://doi.org/10.1007/978-981-19-8086-2_7
30. Gunjan, V.K., Kumar, S., Ansari, M.D., Vijayalata, Y. (2022). Prediction of Agriculture Yields Using Machine Learning Algorithms. In: Gunjan, V.K., Zurada, J.M. (eds) Proceedings of the 2nd International Conference on Recent Trends in Machine Learning, IoT, Smart Cities and Applications. Lecture Notes in Networks and Systems, vol 237. Springer, Singapore. https://doi.org/10.1007/978-981-16-6407-6_2
31. S Megha Chandrika, E Suresh Babu, N Srikanth, Conceptual cohesion of classes in object oriented systems, 2011/7, International Journal of Computer Science and Telecommunications.
32. Dr. C.N. RAVi , SivaShankar, J Sureidhran, Yuvaraj, M Ramkumar, Classification of Diabetes using Multilayer Perceptron Machine Learning 2022 International Conference on Distributed Computing and Electrical Circuits and Electronics (ICDCECE) Impact Factor: DOI: 10.1109/ICDCECE53908.2022.9793085 (22 July 22).
33. Dr. C.N. RAVi , Mrs. Sangavi Srilaxmi, Multi-Layer Perception for Drug Recommendation System Based on Sentiment Analysis of Drug Reviews The International journal of analytical and experimental modal Analysis, Impact Factor: Volume XV, Issue VI, June/2023 ISSN NO: 0886-9367 Page No: 1528, June 2023.
34.] Mahendra Kumar Sinha, **Rajesh Tiwari**, Manisha Sharma and Kamal K. Mehta, "Feature Extraction Techniques from Digital Image of OMR using Histogram with SIMD", International Journal of Advance Research in Computer Science and Software Engineering, Vol. 5, Issue 6, June 2015, pp 1373 – 1381, ISSN: 2277 – 128X.
35. Bharti Patel and **Rajesh Tiwari**, "A Survey of Online Learning Algorithm", Recent Trends in Parallel Computing, Vol. 2, Issue 1, 2015, pp 6 – 9, ISSN: 2393 – 8749
36. L. Pullagura, N. Kittad, G. Diwakar, V. Sathiya, A. Kumar and M. S. Yalawar, "ML based Parkinson's Disease Identification using Gait Parameters," 2022 International Conference on Automation,

Mr.D.Uma Vishveshwar *et. al.*, / **International Journal of Engineering & Science Research**
Computing and Renewable Systems (ICACRS), Pudukkottai, India,
2022, pp. 561-566, doi: 10.1109/ICACRS55517.2022.10029281.

37. Mrutyunjaya S Yalawar, L Umasankar, Mr Bottu Gurunadha Rao, RESIDUE ANALYSIS OF IMAGE QUALITY USING TENSORFLOW, JOURNAL OF CRITICAL REVIEWS, 7,ISSUE 04,1742-1746,2020
38. Sunil Kumar Pandey and **Rajesh Tiwari**, “The optimize load balancing in cluster computing”, International Journal of Advanced Research in Computer Engineering & Technology (IJARCET) , Vol. 2, No 5, May 2013, pp 1844 – 1849 , ISSN: 2278 - 1323.